
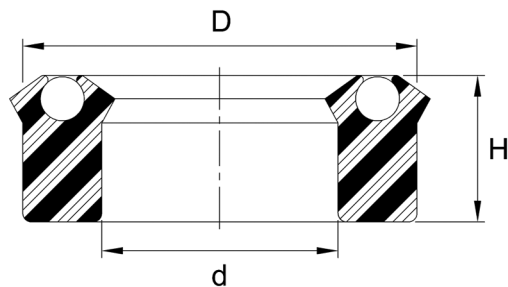


Type B Loaded U-Cups

Polyurethane/Nitrile
Polyester/Polymyte
FPM

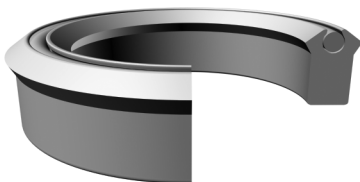

AU/NBR Temperature: -65/200F [-54/93C]
POLY Temperature: -65/275F [-54/135C]
FPM Temperature: -20/400F [-29/204C]

Pressure: 5000 PSI [345 BAR]

**INCH SIZE
ROD/PISTON SEALS**

Ref.Number	Nominal Seal Dimensions				Ref.Number	Nominal Seal Dimensions			
	d	D	H			d	D	H	
1/8” - Cross Section - 0.125”					1/8” - Cross Section - 0.125”				
12500125Q125B	0.125	0.375	0.125		12500750Q250B/V	0.750	1.000	0.250	
12500125-250B	0.125	0.375	0.250		12500800-250B	0.800	1.050	0.250	
12500187Q125B	0.187	0.437	0.125		12500812-125B	0.812	1.062	0.125	
12500187-250B	0.187	0.437	0.250		12500812-250B	0.812	1.062	0.250	
12500250Q125B	0.250	0.500	0.125		12500875-125B	0.875	1.125	0.125	
12500250-187B	0.250	0.500	0.187		12500875-187B	0.875	1.125	0.187	
12500250-250B	0.250	0.500	0.250		12500875-250B	0.875	1.125	0.250	
12500250N250B/P	0.250	0.500	0.250		12500937Q125B	0.937	1.187	0.125	
12500281-250B	0.281	0.531	0.250		12500937-250B	0.937	1.187	0.250	
12500312-125B	0.312	0.562	0.125		12501000-125B	1.000	1.250	0.125	
12500312-250B	0.312	0.562	0.250		12501000-156B	1.000	1.250	0.156	
12500375-125B	0.375	0.625	0.125		12501000-187B	1.000	1.250	0.187	
12500375-187B	0.375	0.625	0.187		12501000N187B/P	1.000	1.250	0.187	
12500375-250B	0.375	0.625	0.250		12501000-250B	1.000	1.250	0.250	
12500437Q125B	0.437	0.687	0.125		12501000Q250B/V	1.000	1.250	0.250	
12500437-250B	0.437	0.687	0.250		12501062Q125B	1.062	1.312	0.125	
12500500-125B	0.500	0.750	0.125		12501062-170B	1.062	1.312	0.170	
12500500-250B	0.500	0.750	0.250		12501062-250B	1.062	1.312	0.250	
12500500Q250B/V	0.500	0.750	0.250		12501125-125B	1.125	1.375	0.125	
12500562-125B	0.562	0.812	0.125		12501125-250B	1.125	1.375	0.250	
12500562-250B	0.562	0.812	0.250		12501125-312B	1.125	1.375	0.312	
12500625-125B	0.625	0.875	0.125		12501187Q178B	1.187	1.437	0.178	
12500625Q125B/V	0.625	0.875	0.125		12501187-187B	1.187	1.437	0.187	
12500625-187B	0.625	0.875	0.187		12501187-250B	1.187	1.437	0.250	
12500625-250B	0.625	0.875	0.250		12501187Q250B/V	1.187	1.437	0.250	
12500625Q250B/V	0.625	0.875	0.250		12501250-125B	1.250	1.500	0.125	
12500625N250B/P	0.625	0.875	0.250		12501250-187B	1.250	1.500	0.187	
12500687Q125B	0.687	0.937	0.125		12501250-250B	1.250	1.500	0.250	
12500687-250B	0.687	0.937	0.250		12501250Q250B/V	1.250	1.500	0.250	
12500750-125B	0.750	1.000	0.125		12501250N250B/P	1.250	1.500	0.250	
12500750V125B/P	0.750	1.000	0.125		12501312Q125B	1.312	1.562	0.125	
12500750-187B	0.750	1.000	0.187		12501312-187B	1.312	1.562	0.187	
12500750-250B	0.750	1.000	0.250		12501375-125B	1.375	1.625	0.125	

NOTE: MINIMUM LINE ORDER MAY APPLY



B SERIES - LOADED U-CUPS

B SERIES - LOADED C-CUTS				
Ref.Number	Nominal Seal Dimensions			
	d	D	H	
1/8" - Cross Section - 0.125"				
12501375-178B	1.375	1.625	0.178	
12501375-187B	1.375	1.625	0.187	
12501375-250B	1.375	1.625	0.250	
12501375-250B/V	1.375	1.625	0.250	
12501437-125B	1.437	1.687	0.125	
12501437-250B	1.437	1.687	0.250	
12501500-125B	1.500	1.750	0.125	
12501500-187B	1.500	1.750	0.187	
12501500-250B	1.500	1.750	0.250	
12501625-125B	1.625	1.875	0.125	
12501625-187B	1.625	1.875	0.187	
12501625-250B	1.625	1.875	0.250	
12501750-125B	1.750	2.000	0.125	
12501750-250B	1.750	2.000	0.250	
12501875-125B	1.875	2.125	0.125	
12501875-187B	1.875	2.125	0.187	
12501875-250B	1.875	2.125	0.250	
12502000-187B	2.000	2.250	0.187	
12502000-250B	2.000	2.250	0.250	
12502125-250B	2.125	2.375	0.250	
12502250Q250B/V	2.250	2.500	0.250	
12502375-187B	2.375	2.625	0.187	
12502500-125B	2.500	2.750	0.125	
12502500-250B	2.500	2.750	0.250	
12502750-250B	2.750	3.000	0.250	
12502875-250B	2.875	3.125	0.250	
12503625-187B	3.625	3.875	0.187	
12503875-250B	3.875	4.125	0.250	
12504000Q125B	4.000	4.250	0.125	
12504250Q125B	4.250	4.500	0.125	
12504500-187B	4.500	4.750	0.187	
12504875-250B	4.875	5.125	0.250	
12506250-125B	6.250	6.500	0.125	
5/32" - Cross Section - 0.156"				
15601000-156B	1.000	1.312	0.156	
15601000-230B	1.000	1.312	0.230	
15601500-312B	1.500	1.812	0.312	
3/16" - Cross Section - 0.187"				
18700187-187B	0.187	0.562	0.187	
18700250-187B	0.250	0.625	0.187	

Ref.Number	Nominal Seal Dimensions			
	d	D	H	
3/16" - Cross Section - 0.187"				
18700250-312B	0.250	0.625	0.312	
18700312-187B	0.312	0.687	0.187	
18700312-312B	0.312	0.687	0.312	
18700375-187B	0.375	0.750	0.187	
18700375-312B	0.375	0.750	0.312	
18700437-312B	0.437	0.812	0.312	
18700500Q187B	0.500	0.875	0.187	
18700500-250B	0.500	0.875	0.250	
18700500-312B	0.500	0.875	0.312	
18700500N312B/P	0.500	0.875	0.312	
18700562-312B	0.562	0.937	0.312	
18700625-187B	0.625	1.000	0.187	
18700625-312B	0.625	1.000	0.312	
18700687-312B	0.687	1.062	0.312	
18700750-187B	0.750	1.125	0.187	
18700750-250B	0.750	1.125	0.250	
18700750-312B	0.750	1.125	0.312	
18700750-375B	0.750	1.125	0.375	
18700812-312B	0.812	1.187	0.312	
18700875-187B	0.875	1.250	0.187	
18700875-312B	0.875	1.250	0.312	
18700937-312B	0.937	1.312	0.312	
18701000-187B	1.000	1.375	0.187	
18701000-250B	1.000	1.375	0.250	
18701000-312B	1.000	1.375	0.312	
18701000Q312B	1.000	1.375	0.312	
18701000Q312B/V	1.000	1.375	0.312	
18701000-375B	1.000	1.375	0.375	
18701000N312B/P	1.000	1.375	0.312	
18701062-312B	1.062	1.437	0.312	
18701125-187B	1.125	1.500	0.187	
18701125-250B	1.125	1.500	0.250	
18701125-312B	1.125	1.500	0.312	
18701125Q312B/V	1.125	1.500	0.312	
18701125-375B	1.125	1.500	0.375	
18701125N312B/P	1.125	1.500	0.312	
18701187-187B	1.187	1.562	0.187	
18701187-250B	1.187	1.562	0.250	
18701187-312B	1.187	1.562	0.312	
18701250-187B	1.250	1.625	0.187	
18701250-250B	1.250	1.625	0.250	
18701250-266B	1.250	1.625	0.266	
18701250-312B	1.250	1.625	0.312	
18701250Q312B/V	1.250	1.625	0.312	

NOTE: MINIMUM LINE ORDER MAY APPLY

B SERIES - LOADED U-CUPS

INCH SIZE
ROD/PISTON SEALS

Ref.Number	Nominal Seal Dimensions			
	d	D	H	
3/16” - Cross Section - 0.187”				
18701250-375B	1.250	1.625	0.375	
18701250N375B/P	1.250	1.625	0.375	
18701312-187B	1.312	1.687	0.187	
18701312-312B	1.312	1.687	0.312	
18701312N312B/P	1.312	1.687	0.312	
18701375-187B	1.375	1.750	0.187	
18701375Q187B/V	1.375	1.750	0.187	
18701375-250B	1.375	1.750	0.250	
18701375-312B	1.375	1.750	0.312	
18701375Q312B/V	1.375	1.750	0.312	
18701375N312B/P	1.375	1.750	0.312	
18701375-375B	1.375	1.750	0.375	
18701437-312B	1.437	1.812	0.312	
18701500-187B	1.500	1.875	0.187	
18701500N187B/P	1.500	1.875	0.187	
18701500-250B	1.500	1.875	0.250	
18701500Q250B/V	1.500	1.875	0.250	
18701500N250B/P	1.500	1.875	0.250	
18701500-266B	1.500	1.875	0.266	
18701500-312B	1.500	1.875	0.312	
18701500-375B	1.500	1.875	0.375	
18701500Q375B/V	1.500	1.875	0.375	
18701500N375B/P	1.500	1.875	0.375	
18701500-406B	1.500	1.875	0.406	
18701562Q187B	1.562	1.937	0.187	
18701562-375B	1.562	1.937	0.375	
18701625-187B	1.625	2.000	0.187	
18701625-250B	1.625	2.000	0.250	
18701625-266B	1.625	2.000	0.266	
18701625-312B	1.625	2.000	0.312	
18701625V312B/P	1.625	2.000	0.312	
18701625-375B	1.625	2.000	0.375	
18701625Q375B/V	1.625	2.000	0.375	
18701625N375B/P	1.625	2.000	0.375	
18701687-187B	1.687	2.062	0.187	
18701750-187B	1.750	2.125	0.187	
18701750-230B	1.750	2.125	0.230	
18701750N230B/P	1.750	2.125	0.230	
18701750-250B	1.750	2.125	0.250	
18701750Q266B	1.750	2.125	0.266	
18701750-312B	1.750	2.125	0.312	
18701750-375B	1.750	2.125	0.375	
18701750Q375B/V	1.750	2.125	0.375	
18701750N375B/P	1.750	2.125	0.375	

Ref.Number	Nominal Seal Dimensions			
	d	D	H	
3/16" - Cross Section - 0.187"				
18701875-187B	1.875	2.250	0.187	
18701875-266B	1.875	2.250	0.266	
18701875-375B	1.875	2.250	0.375	
18701875Q375B/V	1.875	2.250	0.375	
18701937-281B	1.937	2.312	0.281	
18702000-187B	2.000	2.375	0.187	
18702000Q187B/V	2.000	2.375	0.187	
18702000-230B	2.000	2.375	0.230	
18702000-250B	2.000	2.375	0.250	
18702000-312B	2.000	2.375	0.312	
18702000N312B/P	2.000	2.375	0.312	
18702000-375B	2.000	2.375	0.375	
18702000Q375B/V	2.000	2.375	0.375	
18702000N375B/P	2.000	2.375	0.375	
18702125-187B	2.125	2.500	0.187	
18702125-250B	2.125	2.500	0.250	
18702125N250B/P	2.125	2.500	0.250	
18702125Q266B	2.125	2.500	0.266	
18702125-312B	2.125	2.500	0.312	
18702125-375B	2.125	2.500	0.375	
18702187-375B	2.187	2.562	0.375	
18702250-187B	2.250	2.625	0.187	
18702250-312B	2.250	2.625	0.312	
18702250-375B	2.250	2.625	0.375	
18702250N375B/P	2.250	2.625	0.375	
18702375-187B	2.375	2.750	0.187	
18702375-250B	2.375	2.750	0.250	
18702375-266B	2.375	2.750	0.266	
18702375-281B	2.375	2.750	0.281	
18702375-375B	2.375	2.750	0.375	
18702375-437B	2.375	2.750	0.437	
18702375-500B	2.375	2.750	0.500	
18702500-187B	2.500	2.875	0.187	
18702500-250B	2.500	2.875	0.250	
18702500-312B	2.500	2.875	0.312	
18702500-375B	2.500	2.875	0.375	
18702500Q375B/V	2.500	2.875	0.375	
18702500N375B/P	2.500	2.875	0.375	
18702625-187B	2.625	3.000	0.187	
18702625-250B	2.625	3.000	0.250	
18702625-281B	2.625	3.000	0.281	
18702625-312B	2.625	3.000	0.312	
18702625-375B	2.625	3.000	0.375	
18702750-187B	2.750	3.125	0.187	

NOTE: MINIMUM LINE ORDER MAY APPLY



B SERIES - LOADED U-CUPS

Ref.Number	Nominal Seal Dimensions			
	d	D	H	
3/16” - Cross Section - 0.187”				
18702750-281B	2.750	3.125	0.281	
18702750-312B	2.750	3.125	0.312	
18702750-375B	2.750	3.125	0.375	
18702750Q375B/V	2.750	3.125	0.375	
18702875Q187B	2.875	3.250	0.187	
18702875-250B	2.875	3.250	0.250	
18702875Q266B	2.875	3.250	0.266	
18702875-281B	2.875	3.250	0.281	
18702875-375B	2.875	3.250	0.375	
18703000-187B	3.000	3.375	0.187	
18703000-250B	3.000	3.375	0.250	
18703000-312B	3.000	3.375	0.312	
18703000-375B	3.000	3.375	0.375	
18703000Q375B/V	3.000	3.375	0.375	
18703125-187B	3.125	3.500	0.187	
18703125-250B	3.125	3.500	0.250	
18703125-312B	3.125	3.500	0.312	
18703125-375B	3.125	3.500	0.375	
18703250-312B	3.250	3.625	0.312	
18703250-375B	3.250	3.625	0.375	
18703250N375B/P	3.250	3.625	0.375	
18703375-187B	3.375	3.750	0.187	
18703375-250B	3.375	3.750	0.250	
18703375-375B	3.375	3.750	0.375	
18703375N375B/P	3.375	3.750	0.375	
18703500-187B	3.500	3.875	0.187	
18703500-266B	3.500	3.875	0.266	
18703500-281B	3.500	3.875	0.281	
18703500-312B	3.500	3.875	0.312	
18703500-375B	3.500	3.875	0.375	
18703500Q375B/V	3.500	3.875	0.375	
18703500N375B/P	3.500	3.875	0.375	
18703625-187B	3.625	4.000	0.187	
18703625-250B	3.625	4.000	0.250	
18703625-312B	3.625	4.000	0.312	
18703625-375B	3.625	4.000	0.375	
18703750Q187B	3.750	4.125	0.187	
18703750-312B	3.750	4.125	0.312	
18703750-375B	3.750	4.125	0.375	
18703875-187B	3.875	4.250	0.187	
18703875-375B	3.875	4.250	0.375	
18704000-187B	4.000	4.375	0.187	
18704000-250B	4.000	4.375	0.250	
18704000-312B	4.000	4.375	0.312	

Ref.Number	Nominal Seal Dimensions			
	d	D	H	
3/16" - Cross Section - 0.187"				
18704000-375B	4.000	4.375	0.375	
18704000Q375B/V	4.000	4.375	0.375	
18704000N375B/P	4.000	4.375	0.375	
18704125Q187B	4.125	4.500	0.187	
18704125-250B	4.125	4.500	0.250	
18704125-375B	4.125	4.500	0.375	
18704250-281B	4.250	4.625	0.281	
18704250-312B	4.250	4.625	0.312	
18704250-375B	4.250	4.625	0.375	
18704375-375B	4.375	4.750	0.375	
18704500-187B	4.500	4.875	0.187	
18704500-375B	4.500	4.875	0.375	
18704500Q375B/V	4.500	4.875	0.375	
18704500N375B/P	4.500	4.875	0.375	
18704625-250B	4.625	5.000	0.250	
18704625-312B	4.625	5.000	0.312	
18704625-375B	4.625	5.000	0.375	
18704750-375B	4.750	5.125	0.375	
18704875-375B	4.875	5.250	0.375	
18705000-281B	5.000	5.375	0.281	
18705000-375B	5.000	5.375	0.375	
18705125Q187B	5.125	5.500	0.187	
18705500-375B	5.500	5.875	0.375	
18705500-375B/V	5.500	5.875	0.375	
18705750Q375B	5.750	6.125	0.375	
18706000-375B	6.000	6.375	0.375	
18707000-375B	7.000	7.375	0.375	
7/32" - Cross Section - 0.218"				
21802500Q218B	2.500	2.937	0.218	
21802562Q218B	2.562	3.000	0.218	
1/4" - Cross Section - 0.250"				
25000250-375B	0.250	0.750	0.375	
25000437-375B	0.437	0.937	0.375	
25000478-375B	0.478	0.978	0.375	
25000500-375B	0.500	1.000	0.375	
25000562-375B	0.562	1.062	0.375	
25000625-312B	0.625	1.125	0.312	
25000625-375B	0.625	1.125	0.375	
25000687-375B	0.687	1.187	0.375	
25000750-250B	0.750	1.250	0.250	

NOTE: MINIMUM LINE ORDER MAY APPLY

B SERIES - LOADED U-CUPS

INCH SIZE
ROD/PISTON SEALS

Ref.Number	Nominal Seal Dimensions			
	d	D	H	
1/4" - Cross Section - 0.250"				
25000750-375B	0.750	1.250	0.375	
25000812-375B	0.812	1.312	0.375	
25000875-250B	0.875	1.375	0.250	
25000875-312B	0.875	1.375	0.312	
25000875-375B	0.875	1.375	0.375	
25001000-250B	1.000	1.500	0.250	
25001000-375B	1.000	1.500	0.375	
25001000Q375B/V	1.000	1.500	0.375	
25001125-250B	1.125	1.625	0.250	
25001125-375B	1.125	1.625	0.375	
25001250-250B	1.250	1.750	0.250	
25001250-375B	1.250	1.750	0.375	
25001250Q375B/V	1.250	1.750	0.375	
25001250N375B/P	1.250	1.750	0.375	
25001312-375B	1.312	1.812	0.375	
25001375-250B	1.375	1.875	0.250	
25001375-375B	1.375	1.875	0.375	
25001375Q375B/V	1.375	1.875	0.375	
25001375N375B/P	1.375	1.875	0.375	
25001500-250B	1.500	2.000	0.250	
25001500-312B	1.500	2.000	0.312	
25001500-375B	1.500	2.000	0.375	
25001500Q375B/V	1.500	2.000	0.375	
25001500N375B/P	1.500	2.000	0.375	
25001500-500B	1.500	2.000	0.500	
25001625-375B	1.625	2.125	0.375	
25001750-250B	1.750	2.250	0.250	
25001750-312B	1.750	2.250	0.312	
25001750-375B	1.750	2.250	0.375	
25001750Q375B/V	1.750	2.250	0.375	
25001750V375B/P	1.750	2.250	0.375	
25001750N375B/NX	1.750	2.250	0.375	
25001875-375B	1.875	2.375	0.375	
25001937-375B	1.937	2.437	0.375	
25002000-250B	2.000	2.500	0.250	
25002000-312B	2.000	2.500	0.312	
25002000-375B	2.000	2.500	0.375	
25002000Q375B/V	2.000	2.500	0.375	
25002000N375B/P	2.000	2.500	0.375	
25002000V375B/P	2.000	2.500	0.375	
25002125-250B	2.125	2.625	0.250	
25002125-375B	2.125	2.625	0.375	
25002187-375B	2.187	2.687	0.375	
25002250-375B	2.250	2.750	0.375	

Ref.Number	Nominal Seal Dimensions			
	d	D	H	
1/4” - Cross Section - 0.250”				
25002250Q375B/V	2.250	2.750	0.375	
25002250N375B/P	2.250	2.750	0.375	
25002375-375B	2.375	2.875	0.375	
25002375-562B	2.375	2.875	0.562	
25002500-250B	2.500	3.000	0.250	
25002500-312B	2.500	3.000	0.312	
25002500-375B	2.500	3.000	0.375	
25002500Q375B/V	2.500	3.000	0.375	
25002500N375B/P	2.500	3.000	0.375	
25002500-500B	2.500	3.000	0.500	
25002562-375B	2.562	3.062	0.375	
25002625-375B	2.625	3.125	0.375	
25002750-250B	2.750	3.250	0.250	
25002750-375B	2.750	3.250	0.375	
25002750Q375B/V	2.750	3.250	0.375	
25002750N375B/P	2.750	3.250	0.375	
25002750-500B	2.750	3.250	0.500	
25002875-375B	2.875	3.375	0.375	
25003000-250B	3.000	3.500	0.250	
25003000Q250B	3.000	3.500	0.250	
25003000-375B	3.000	3.500	0.375	
25003000Q375B/V	3.000	3.500	0.375	
25003000N375B/P	3.000	3.500	0.375	
25003000V375B/P	3.000	3.500	0.375	
25003000-500B	3.000	3.500	0.500	
25003000-562B	3.000	3.500	0.562	
25003125-250B	3.125	3.625	0.250	
25003125-375B	3.125	3.625	0.375	
25003250-375B	3.250	3.750	0.375	
25003250N375B/P	3.250	3.750	0.375	
25003250-500B	3.250	3.750	0.500	
25003375-250B	3.375	3.875	0.250	
25003375-375B	3.375	3.875	0.375	
25003375N375B/P	3.375	3.875	0.375	
25003375-562B	3.375	3.875	0.562	
25003500-250B	3.500	4.000	0.250	
25003500-312B	3.500	4.000	0.312	
25003500-375B	3.500	4.000	0.375	
25003500Q375B/V	3.500	4.000	0.375	
25003500N375B/P	3.500	4.000	0.375	
25003500V375B/P	3.500	4.000	0.375	
25003500N375B/U	3.500	4.000	0.375	
25003500-625B	3.500	4.000	0.625	
25003625-375B	3.625	4.125	0.375	

NOTE: MINIMUM LINE ORDER MAY APPLY

