
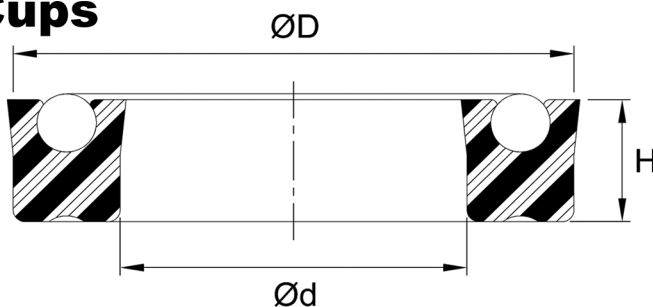


Standard Loaded U-Cups

Polyurethane/Nitrile
Polyester/Polymyte
FPM

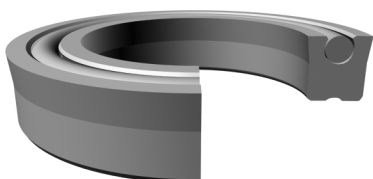

AU/NBR Temperature: -65/200F [-54/93C]
POLY Temperature: - 65/ 275F [-54/135C]
FPM Temperature: -20/400F [-29/204C]

Pres: 5000 PSI [345 BAR]

Ref.Number	Nominal Seal Dimensions				Ref.Number	Nominal Seal Dimensions			
	d	D	H			d	D	H	
1/8” - Cross Section - 0.125”					1/8” - Cross Section - 0.125”				
12500062	0.062	0.312	0.125		12501187	1.187	1.437	0.125	
12500093	0.093	0.343	0.125		12501250	1.250	1.500	0.125	
12500125	0.125	0.375	0.125		12501250Q/V	1.250	1.500	0.125	
12500140	0.140	0.390	0.125		12501312	1.312	1.562	0.125	
12500187	0.187	0.437	0.125		12501375	1.375	1.625	0.125	
12500250	0.250	0.500	0.125		12501375Q/V	1.375	1.375	0.125	
12500250Q/V	0.250	0.500	0.125		12501437	1.437	1.687	0.125	
12500250V/P	0.250	0.500	0.125		12501500	1.500	1.750	0.125	
12500312	0.312	0.562	0.125		12501500Q/V	1.500	1.750	0.125	
12500359	0.359	0.609	0.125		12501500N/P	1.500	1.750	0.125	
12500375	0.375	0.625	0.125		12501562Q	1.562	1.812	0.125	
12500375Q/V	0.375	0.625	0.125		12501625	1.625	1.875	0.125	
12500375N/P	0.375	0.625	0.125		12501687	1.687	1.937	0.125	
12500437	0.437	0.687	0.125		12501750	1.750	2.000	0.125	
12500500	0.500	0.750	0.125		12501750Q/V	1.750	2.000	0.125	
12500531	0.531	0.781	0.125		12501750N/P	1.750	2.000	0.125	
12500562	0.562	0.812	0.125		12501875	1.875	2.125	0.125	
12500625	0.625	0.875	0.125		12502000	2.000	2.250	0.125	
12500625Q/V	0.625	0.875	0.125		12502125	2.125	2.375	0.125	
12500687	0.687	0.937	0.125		12502250	2.250	2.500	0.125	
12500750	0.750	1.000	0.125		12502375	2.375	2.625	0.125	
12500750Q/V	0.750	1.000	0.125		12502500	2.500	2.750	0.125	
12500812	0.813	1.063	0.125		12502625	2.625	2.875	0.125	
12500875	0.875	1.125	0.125		12502750	2.750	3.000	0.125	
12500875Q/V	0.875	1.125	0.125		12502875	2.875	3.125	0.125	
12500906	0.906	1.156	0.125		12503000	3.000	3.250	0.125	
12500937	0.937	1.187	0.125		12503125	3.125	3.375	0.125	
12501000	1.000	1.250	0.125		12503250	3.250	3.500	0.125	
12501000Q/V	1.000	1.125	0.125		12503500	3.500	3.750	0.125	
12501062	1.062	1.312	0.125		12503625	3.625	3.875	0.125	
12501125	1.125	1.375	0.125		12503750	3.750	4.000	0.125	
12501125Q/V	1.125	1.375	0.125		12503875	3.875	4.125	0.125	
12501125N/P	1.125	1.375	0.125		12504000	4.000	4.250	0.125	

NOTE: MINIMUM LINE ORDER MAY APPLY

STD SERIES - LOADED U-CUPS

INCH SIZE
ROD/PISTON SEALS



Ref.Number	Nominal Seal Dimensions			
	d	D	H	
1/8" - Cross Section - 0.125"				
12504250	4.250	4.500	0.125	
12504375	4.375	4.625	0.125	
12504500	4.500	4.750	0.125	
12504750	4.750	5.000	0.125	
12504875	4.875	5.125	0.125	
12505000	5.000	5.250	0.125	
12505750	5.750	6.000	0.125	
5/32" - Cross Section - 0.156"				
15600437	0.437	0.750	0.156	
15600750	0.750	1.062	0.156	
15600937	0.937	1.250	0.156	
15601000	1.000	1.312	0.156	
15601000Q/V	1.000	1.312	0.156	
15601062	1.062	1.375	0.156	
15601125	1.125	1.437	0.156	
15601187	1.187	1.500	0.156	
15601187Q/V	1.187	1.500	0.156	
15601250	1.250	1.562	0.156	
15601375	1.375	1.687	0.156	
15601375Q/V	1.375	1.687	0.156	
15601500	1.500	1.812	0.156	
15602062	2.062	2.375	0.156	
11/64" - Cross Section - 0.171"				
17100562	0.562	0.906	0.171	
3/16" - Cross Section - 0.187"				
18700187	0.187	0.562	0.187	
18700250	0.250	0.625	0.187	
18700312	0.312	0.687	0.187	
18700375	0.375	0.750	0.187	
18700375Q/V	0.375	0.750	0.187	
18700437	0.437	0.812	0.187	
18700500	0.500	0.875	0.187	
18700500Q/V	0.500	0.875	0.187	
18700562	0.562	0.937	0.187	
18700625	0.625	1.000	0.187	
18700625N/P	0.625	1.000	0.187	
18700656	0.656	1.031	0.187	
18700687	0.687	1.062	0.187	

NOTE: MINIMUM LINE ORDER MAY APPLY

Ref.Number	Nominal Seal Dimensions			
	d	D	H	
3/16" - Cross Section - 0.187"				
18700750	0.750	1.125	0.187	
18700812	0.812	1.187	0.187	
18700875	0.875	1.250	0.187	
18700875N/P	0.875	1.250	0.187	
18700937	0.937	1.312	0.187	
18701000	1.000	1.375	0.187	
18701000Q/V	1.000	1.375	0.187	
18701000N/P	1.000	1.375	0.187	
18701062	1.062	1.437	0.187	
18701062/V	1.062	1.437	0.187	
18701125	1.125	1.500	0.187	
18701125Q/V	1.125	1.500	0.187	
18701187	1.187	1.562	0.187	
18701250	1.250	1.625	0.187	
18701312	1.312	1.687	0.187	
18701375	1.375	1.750	0.187	
18701375N/P	1.375	1.750	0.187	
18701437	1.437	1.812	0.187	
18701500	1.500	1.875	0.187	
18701500N/P	1.500	1.875	0.187	
18701562	1.562	1.937	0.187	
18701625	1.625	2.000	0.187	
18701625Q/V	1.625	2.000	0.187	
18701625N/P	1.625	2.000	0.187	
18701687	1.687	2.062	0.187	
18701750	1.750	2.125	0.187	
18701750Q/V	1.750	2.125	0.187	
18701750N/P	1.750	2.125	0.187	
18701812	1.812	2.187	0.187	
18701875	1.875	2.250	0.187	
18701937	1.937	2.312	0.187	
18702000	2.000	2.375	0.187	
18702000Q/V	2.000	2.375	0.187	
18702000N/P	2.000	2.375	0.187	
18702062	2.062	2.437	0.187	
18702125	2.125	2.500	0.187	
18702125Q/V	2.125	2.500	0.187	
18702125N/P	2.125	2.500	0.187	
18702250	2.250	2.625	0.187	
18702250Q/V	2.250	2.625	0.187	
18702375	2.375	2.750	0.187	
18702500	2.500	2.875	0.187	
18702500Q/V	2.500	2.875	0.187	
18702500N/P	2.500	2.875	0.187	

STD SERIES - LOADED U-CUPS

Ref.Number	Nominal Seal Dimensions			
	d	D	H	
3/16" - Cross Section - 0.187"				
18702625	2.625	3.000	0.187	
18702750	2.750	3.125	0.187	
18702750Q/V	2.750	3.125	0.187	
18702750N/P	2.750	3.125	0.187	
18702875	2.875	3.250	0.187	
18702875Q/V	2.875	3.250	0.187	
18703000	3.000	3.375	0.187	
18703000Q/V	3.000	3.375	0.187	
18703000N/P	3.000	3.375	0.187	
18703125	3.125	3.500	0.187	
18703250	3.250	3.625	0.187	
18703375	3.375	3.750	0.187	
18703375N/P	3.375	3.750	0.187	
18703500	3.500	3.875	0.187	
18703625	3.625	4.000	0.187	
18703625N/P	3.625	4.000	0.187	
18703750	3.750	4.125	0.187	
18703875	3.875	4.250	0.187	
18704000	4.000	4.375	0.187	
18704000Q/V	4.000	4.375	0.187	
18704000N/P	4.000	4.375	0.187	
18704125	4.125	4.500	0.187	
18704250	4.250	4.625	0.187	
18704375	4.375	4.750	0.187	
18704500	4.500	4.875	0.187	
18704625	4.625	5.000	0.187	
18704750	4.750	5.125	0.187	
18704875	4.875	5.250	0.187	
18705000	5.000	5.375	0.187	
18705250	5.250	5.625	0.187	
18705687	5.687	6.062	0.187	
18705875	5.875	6.250	0.187	
18706000	6.000	6.375	0.187	
18706312	6.312	6.687	0.187	
7/32" - Cross Section - 0.218"				
21800312Q	0.312	0.750	0.218	
21800437	0.437	0.875	0.218	
21800562	0.562	1.000	0.218	
21800750	0.750	1.187	0.218	
21800937	0.937	1.375	0.218	
21801750	1.750	2.187	0.218	
21802062	2.062	2.500	0.218	

Ref.Number	Nominal Seal Dimensions			
	d	D	H	
7/32" - Cross Section - 0.218"				
21802500	2.500	2.937	0.218	
21802562Q	2.562	3.000	0.218	
21802812	2.812	3.250	0.218	
21803000	3.000	3.437	0.218	
21803062	3.062	3.500	0.218	
21803437	3.437	3.875	0.218	
1/4" - Cross Section - 0.250"				
25000250	0.250	0.750	0.250	
25000312	0.312	0.812	0.250	
25000375	0.375	0.875	0.250	
25000437Q	0.437	0.937	0.250	
25000500	0.500	1.000	0.250	
25000562	0.562	1.062	0.250	
25000625	0.625	1.125	0.250	
25000625Q/V	0.625	1.125	0.250	
25000687	0.687	1.187	0.250	
25000750	0.750	1.250	0.250	
25000812	0.812	1.312	0.250	
25000875	0.875	1.375	0.250	
25000875N/P	0.875	1.375	0.250	
25000937	0.937	1.437	0.250	
25001000	1.000	1.500	0.250	
25001000Q/V	1.000	1.500	0.250	
25001000V/P	1.000	1.500	0.250	
25001062	1.062	1.562	0.250	
25001093	1.093	1.593	0.250	
25001125	1.125	1.625	0.250	
25001187	1.187	1.687	0.250	
25001250	1.250	1.750	0.250	
25001312	1.312	1.812	0.250	
25001375	1.375	1.875	0.250	
25001437	1.437	1.937	0.250	
25001500	1.500	2.000	0.250	
25001500Q/V	1.500	2.000	0.250	
25001625	1.625	2.125	0.250	
25001750	1.750	2.250	0.250	
25001750Q/V	1.750	2.250	0.250	
25001875	1.875	2.375	0.250	
25002000	2.000	2.500	0.250	
25002000Q/V	2.000	2.500	0.250	
25002000N/P	2.000	2.500	0.250	
25002125	2.125	2.625	0.250	

NOTE: MINIMUM LINE ORDER MAY APPLY

STD SERIES - LOADED U-CUPS

INCH SIZE
ROD/PISTON SEALS

Ref.Number	Nominal Seal Dimensions				Ref.Number	Nominal Seal Dimensions			
	d	D	H			d	D	H	
1/4” - Cross Section - 0.250”					1/4” - Cross Section - 0.250”				
25002250	2.250	2.750	0.250		25005500N/P	5.500	6.000	0.250	
25002375	2.375	2.875	0.250		25005625	5.625	6.125	0.250	
25002500	2.500	3.000	0.250		25005750	5.750	6.250	0.250	
25002500Q/V	2.500	3.000	0.250		25005750N/P	5.750	6.250	0.250	
25002500N/P	2.500	3.000	0.250		25005875	5.875	6.375	0.250	
25002625	2.625	3.125	0.250		25006000	6.000	6.500	0.250	
25002750	2.750	3.250	0.250		25006000N/P	6.000	6.500	0.250	
25002750Q/V	2.750	3.250	0.250		25006250	6.250	6.750	0.250	
25002750N/P	2.750	3.250	0.250		25006500	6.500	7.000	0.250	
25002875	2.875	3.375	0.250		25006500V/P	6.500	7.000	0.250	
25003000	3.000	3.500	0.250		25006750	6.750	7.250	0.250	
25003000Q/V	3.000	3.500	0.250		25007000	7.000	7.500	0.250	
25003000N/P	3.000	3.500	0.250		25007000N/P	7.000	7.500	0.250	
25003125	3.125	3.625	0.250		25007125	7.125	7.625	0.250	
25003250	3.250	3.750	0.250		25007250	7.250	7.750	0.250	
25003375	3.375	3.875	0.250		25007437	7.437	7.937	0.250	
25003500	3.500	4.000	0.250		25007500	7.500	8.000	0.250	
25003500Q/V	3.500	4.000	0.250		25007500N/P	7.500	8.000	0.250	
25003500N/P	3.500	4.000	0.250		25007750	7.750	8.250	0.250	
25003500Q	3.500	4.000	0.250		25007812	7.812	8.312	0.250	
25003625	3.625	4.125	0.250		25008000	8.000	8.500	0.250	
25003750	3.750	4.250	0.250		25008000N/P	8.000	8.500	0.250	
25003850	3.850	4.350	0.250		25008250	8.250	8.750	0.250	
25003875	3.875	4.375	0.250		25008500	8.500	9.000	0.250	
25004000	4.000	4.500	0.250		25008750	8.750	9.250	0.250	
25004000Q/V	4.000	4.500	0.250		25009000	9.000	9.500	0.250	
25004000N/P	4.000	4.500	0.250		25009000N/P	9.000	9.500	0.250	
25004125	4.125	4.625	0.250		25009250	9.250	9.750	0.250	
25004250	4.250	4.750	0.250		25009250N/P	9.250	9.750	0.250	
25004250N/P	4.250	4.750	0.250		25009500	9.500	10.000	0.250	
25004375	4.375	4.875	0.250		25009750	9.750	10.250	0.250	
25004500	4.500	5.000	0.250		25010000	10.000	10.500	0.250	
25004500Q/V	4.500	5.000	0.250		25010000N/P	10.000	10.500	0.250	
25004500N/P	4.500	5.000	0.250		25010250	10.250	10.750	0.250	
25004625	4.625	5.125	0.250		25010250N/P	10.250	10.750	0.250	
25004750	4.750	5.250	0.250		25010500	10.500	11.000	0.250	
25004875	4.875	5.375	0.250		25010500N/P	10.500	11.000	0.250	
25005000	5.000	5.500	0.250		25010750	10.750	11.250	0.250	
25005000N/P	5.000	5.500	0.250		25010875	10.875	11.375	0.250	
25005125	5.125	5.625	0.250		25011000	11.000	11.500	0.250	
25005250	5.250	5.750	0.250		25011500	11.500	12.000	0.250	
25005375	5.375	5.875	0.250		25011750	11.750	12.250	0.250	
25005500	5.500	6.000	0.250		25012000	12.000	12.500	0.250	
25005500Q/V	5.500	6.000	0.250		25012500Q	12.500	13.000	0.250	

NOTE: MINIMUM LINE ORDER MAY APPLY



STD SERIES - LOADED U-CUPS

STD SERIES - LEAKED O-RINGS				
Ref.Number	Nominal Seal Dimensions			
	d	D	H	
1/4" - Cross Section - 0.250"				
25013000	13.000	13.500	0.250	
25013500	13.500	14.000	0.250	
25014000	14.000	14.500	0.250	
25014125	14.125	14.625	0.250	
25014250	14.250	14.750	0.250	
25014500	14.500	15.000	0.250	
25019000	19.000	19.500	0.250	
25023000	23.000	23.500	0.250	
25023500	23.500	24.000	0.250	
25024000	24.000	24.500	0.250	
25024500	24.500	25.000	0.250	
9/32" - Cross Section - 0.281"				
28100187	0.187	0.750	0.281	
28100687	0.687	1.250	0.281	
28101000	1.000	1.562	0.281	
28102312	2.312	2.875	0.281	
28102562	2.562	3.125	0.281	
28104437	4.437	5.000	0.281	
28105000	5.000	5.562	0.281	
28105437	5.437	6.000	0.281	
28106437	6.437	7.000	0.281	
28108500	8.500	9.062	0.281	
5/16" - Cross Section - 0.312"				
31200250	0.250	0.875	0.312	
31200375	0.375	1.000	0.312	
31200437	0.437	1.062	0.312	
31200500	0.500	1.125	0.312	
31200625Q	0.625	1.250	0.312	
31200687	0.687	1.312	0.312	
31200750	0.750	1.375	0.312	
31200812	0.812	1.437	0.312	
31200875	0.875	1.500	0.312	
31201000	1.000	1.625	0.312	
31201062	1.062	1.687	0.312	
31201125	1.125	1.750	0.312	
31201187	1.187	1.812	0.312	
31201250	1.250	1.875	0.312	
31201312	1.312	1.937	0.312	
31201375	1.375	2.000	0.312	
31201375Q/V	1.375	2.000	0.312	
5/16" - Cross Section - 0.312"				
31201375N/P	1.375	2.000	0.312	
31201500	1.500	2.125	0.312	
31201625	1.625	2.250	0.312	
31201687	1.687	2.312	0.312	
31201750	1.750	2.375	0.312	
31201750N/P	1.750	2.375	0.312	
31201875	1.875	2.500	0.312	
31201937	1.937	2.562	0.312	
31202000	2.000	2.625	0.312	
31202125	2.125	2.750	0.312	
31202250	2.250	2.875	0.312	
31202312	2.312	2.937	0.312	
31202375	2.375	3.000	0.312	
31202375Q/V	2.375	3.000	0.312	
31202500	2.500	3.125	0.312	
31202562	2.562	3.187	0.312	
31202625	2.625	3.250	0.312	
31202750	2.750	3.375	0.312	
31202875	2.875	3.500	0.312	
31203000	3.000	3.625	0.312	
31203125	3.125	3.750	0.312	
31203250	3.250	3.875	0.312	
31203375	3.375	4.000	0.312	
31203375/V	3.375	4.000	0.312	
31203500	3.500	4.125	0.312	
31203625	3.625	4.250	0.312	
31203625Q/V	3.625	4.250	0.312	
31203750	3.750	4.375	0.312	
31203875	3.875	4.500	0.312	
31204000	4.000	4.625	0.312	
31204125	4.125	4.750	0.312	
31204250	4.250	4.875	0.312	
31204375	4.375	5.000	0.312	
31204375N/P	4.375	5.000	0.312	
31204500	4.500	5.125	0.312	
31204750	4.750	5.375	0.312	
31204875	4.875	5.500	0.312	
31205000	5.000	5.625	0.312	
31205125	5.125	5.750	0.312	
31205250	5.250	5.875	0.312	
31205375	5.375	6.000	0.312	
31205375Q/V	5.375	6.000	0.312	
31205375N/P	5.375	6.000	0.312	
31205500	5.500	6.125	0.312	

NOTE: MINIMUM LINE ORDER MAY APPLY