


J/N - Rod Wipers

Nitrile/Steel

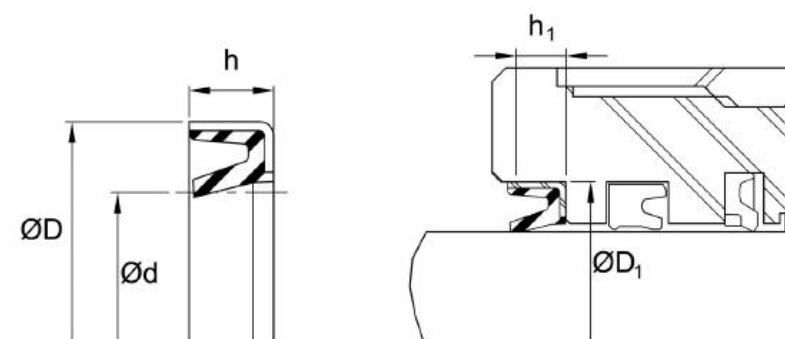

Temperature: -50/250F [-45/121C]

Pressure: N/A

Ref.Number	Rod diameter		Nominal Seal Dimensions			Housing Dimensions						
	Tol.		d	D	h	d1	Tol.	D1	Tol.	h1	Tol.	
J01870500125/N	0.187	+ .003 / - .003	0.187	0.500	0.125			0.500	+ .001 / - .001	0.125	+ .015 / - .000	
J03750625125/N	0.375	+ .003 / - .003	0.375	0.625	0.125			0.625	+ .001 / - .001	0.125	+ .015 / - .000	
J03750687156/N	0.375	+ .003 / - .003	0.375	0.687	0.156			0.687	+ .001 / - .001	0.156	+ .015 / - .000	
J05000687094/N	0.500	+ .003 / - .003	0.500	0.687	0.094			0.687	+ .001 / - .001	0.094	+ .015 / - .000	
J05000750125/N	0.500	+ .003 / - .003	0.500	0.750	0.125			0.750	+ .001 / - .001	0.125	+ .015 / - .000	
J05001125250/N	0.500	+ .003 / - .003	0.500	1.125	0.250			1.125	+ .001 / - .001	0.250	+ .015 / - .000	
J06250875125/N	0.625	+ .003 / - .003	0.625	0.875	0.125			0.875	+ .001 / - .001	0.125	+ .015 / - .000	
J06250937187/N	0.625	+ .003 / - .003	0.625	0.937	0.187			0.937	+ .001 / - .001	0.187	+ .015 / - .000	
J06251000125/N	0.625	+ .003 / - .003	0.625	1.000	0.125			1.000	+ .001 / - .001	0.125	+ .015 / - .000	
J06870937125/N	0.687	+ .003 / - .003	0.687	0.937	0.125			0.937	+ .001 / - .001	0.125	+ .015 / - .000	
J06871000187/N	0.687	+ .003 / - .003	0.687	1.000	0.187			1.000	+ .001 / - .001	0.187	+ .015 / - .000	
J07501000125/N	0.750	+ .003 / - .003	0.750	1.000	0.125			1.000	+ .001 / - .001	0.125	+ .015 / - .000	
J07501062187/N	0.750	+ .003 / - .003	0.750	1.062	0.187			1.062	+ .001 / - .001	0.187	+ .015 / - .000	
J07501125187/N	0.750	+ .003 / - .003	0.750	1.125	0.187			1.125	+ .001 / - .001	0.187	+ .015 / - .000	
J07501250250/N	0.750	+ .003 / - .003	0.750	1.250	0.250			1.250	+ .001 / - .001	0.250	+ .015 / - .000	
J07501375375/N	0.750	+ .003 / - .003	0.750	1.375	0.375			1.375	+ .001 / - .001	0.375	+ .015 / - .000	
J08751125125/N	0.875	+ .003 / - .003	0.875	1.125	0.125			1.125	+ .001 / - .001	0.125	+ .015 / - .000	
J08751250187/N	0.875	+ .003 / - .003	0.875	1.250	0.187			1.250	+ .001 / - .001	0.187	+ .015 / - .000	
J08751312236/N	0.875	+ .003 / - .003	0.875	1.312	0.236			1.312	+ .001 / - .001	0.236	+ .015 / - .000	
J10001250125/N	1.000	+ .003 / - .003	1.000	1.250	0.125			1.250	+ .001 / - .001	0.125	+ .015 / - .000	
J10001312125/N	1.000	+ .003 / - .003	1.000	1.312	0.125			1.312	+ .001 / - .001	0.125	+ .015 / - .000	
J10001375187/N	1.000	+ .003 / - .003	1.000	1.375	0.187			1.375	+ .001 / - .001	0.187	+ .015 / - .000	
J10001437250/N	1.000	+ .003 / - .003	1.000	1.437	0.250			1.437	+ .001 / - .001	0.250	+ .015 / - .000	
J10001500187/N	1.000	+ .003 / - .003	1.000	1.500	0.187			1.500	+ .001 / - .001	0.187	+ .015 / - .000	



J/N SERIES - NBR/STEEL

INCH SIZE
ROD WIPERS

Ref.Number	Rod diameter	Nominal Seal Dimensions			Housing Dimensions						
	Tol.	d	D	h	d1	Tol.	D1	Tol.	h1	Tol.	
J10001625250/N	1.000 +.003 / -.003	1.000	1.625	0.250			1.625 +.001 / -.001		0.250 +.015 / -.000		
J10001625375/N	1.000 +.003 / -.003	1.000	1.625	0.375			1.625 +.001 / -.001		0.375 +.015 / -.000		
J10621312125/N	1.062 +.003 / -.003	1.062	1.312	0.125			1.312 +.001 / -.001		0.125 +.015 / -.000		
J10621437187/N	1.062 +.003 / -.003	1.062	1.437	0.187			1.437 +.001 / -.001		0.187 +.015 / -.000		
J10621500187/N	1.062 +.003 / -.003	1.062	1.500	0.187			1.500 +.001 / -.001		0.187 +.015 / -.000		
J11251375125/N	1.125 +.003 / -.003	1.125	1.375	0.125			1.375 +.001 / -.001		0.125 +.015 / -.000		
J11251500187/N	1.125 +.003 / -.003	1.125	1.500	0.187			1.500 +.001 / -.001		0.187 +.015 / -.000		
J11251500250/N	1.125 +.003 / -.003	1.125	1.500	0.250			1.500 +.001 / -.001		0.250 +.015 / -.000		
J11251562250/N	1.125 +.003 / -.003	1.125	1.562	0.250			1.562 +.001 / -.001		0.250 +.015 / -.000		
J11251625250/N	1.125 +.003 / -.003	1.125	1.625	0.250			1.625 +.001 / -.001		0.250 +.015 / -.000		
J11871625250/N	1.187 +.003 / -.003	1.187	1.625	0.250			1.625 +.001 / -.001		0.250 +.015 / -.000		
J12501500125/N	1.250 +.003 / -.003	1.250	1.500	0.125			1.500 +.001 / -.001		0.125 +.015 / -.000		
J12501625250/N	1.250 +.003 / -.003	1.250	1.625	0.250			1.625 +.001 / -.001		0.250 +.015 / -.000		
J12501687187/N	1.250 +.003 / -.003	1.250	1.687	0.187			1.687 +.001 / -.001		0.187 +.015 / -.000		
J12501750250/N	1.250 +.003 / -.003	1.250	1.750	0.250			1.750 +.001 / -.001		0.250 +.015 / -.000		
J12501875250/N	1.250 +.003 / -.003	1.250	1.875	0.250			1.875 +.001 / -.001		0.250 +.015 / -.000		
J13751625125/N	1.375 +.003 / -.003	1.375	1.625	0.125			1.625 +.001 / -.001		0.125 +.015 / -.000		
J13751750187/N	1.375 +.003 / -.003	1.375	1.750	0.187			1.750 +.001 / -.001		0.187 +.015 / -.000		
J13751875250/N	1.375 +.003 / -.003	1.375	1.875	0.250			1.875 +.001 / -.001		0.250 +.015 / -.000		
J13751937250/N	1.375 +.003 / -.003	1.375	1.937	0.250			1.937 +.001 / -.001		0.250 +.015 / -.000		
J15001750125/N	1.500 +.003 / -.003	1.500	1.750	0.125			1.750 +.001 / -.001		0.125 +.015 / -.000		
J15001875187/N	1.500 +.003 / -.003	1.500	1.875	0.187			1.875 +.001 / -.001		0.187 +.015 / -.000		
J15001875250/N	1.500 +.003 / -.003	1.500	1.875	0.250			1.875 +.001 / -.001		0.250 +.015 / -.000		
J15002000187/N	1.500 +.003 / -.003	1.500	2.000	0.187			2.000 +.001 / -.001		0.187 +.015 / -.000		
J15002000250/N	1.500 +.003 / -.003	1.500	2.000	0.250			2.000 +.001 / -.001		0.250 +.015 / -.000		
J15622500250/N	1.562 +.003 / -.003	1.562	2.500	0.250			2.500 +.001 / -.001		0.250 +.015 / -.000		
J16252000187/N	1.625 +.003 / -.003	1.625	2.000	0.187			2.000 +.001 / -.001		0.187 +.015 / -.000		
J16252125250/N	1.625 +.003 / -.003	1.625	2.125	0.250			2.125 +.001 / -.001		0.250 +.015 / -.000		
J17502125187/N	1.750 +.003 / -.003	1.750	2.125	0.187			2.125 +.001 / -.001		0.187 +.015 / -.000		
J17502156187/N	1.750 +.003 / -.003	1.750	2.156	0.187			2.156 +.001 / -.001		0.187 +.015 / -.000		
J17502250250/N	1.750 +.003 / -.003	1.750	2.250	0.250			2.250 +.001 / -.001		0.250 +.015 / -.000		
J17502375250/N	1.750 +.003 / -.003	1.750	2.375	0.250			2.375 +.001 / -.001		0.250 +.015 / -.000		
J17502625250/N	1.750 +.003 / -.003	1.750	2.625	0.250			2.625 +.001 / -.001		0.250 +.015 / -.000		
J18752250187/N	1.875 +.003 / -.003	1.875	2.250	0.187			2.250 +.001 / -.001		0.187 +.015 / -.000		
J18752500250/N	1.875 +.003 / -.003	1.875	2.500	0.250			2.500 +.001 / -.001		0.250 +.015 / -.000		
J20002375187/N	2.000 +.003 / -.003	2.000	2.375	0.187			2.375 +.001 / -.001		0.187 +.015 / -.000		
J20002500250/N	2.000 +.003 / -.003	2.000	2.500	0.250			2.500 +.001 / -.001		0.250 +.015 / -.000		
J20002625250/N	2.000 +.003 / -.003	2.000	2.625	0.250			2.625 +.001 / -.001		0.250 +.015 / -.000		
J20002750250/N	2.000 +.003 / -.003	2.000	2.750	0.250			2.750 +.001 / -.001		0.250 +.015 / -.000		
J20002687375/N	2.000 +.003 / -.003	2.000	2.687	0.375			2.687 +.001 / -.001		0.375 +.015 / -.000		
J20002875468/N	2.000 +.003 / -.003	2.000	2.875	0.468			2.875 +.001 / -.001		0.468 +.015 / -.000		
J21252500187/N	2.125 +.003 / -.003	2.125	2.500	0.187			2.500 +.001 / -.001		0.187 +.015 / -.000		
J22502625187/N	2.250 +.003 / -.003	2.250	2.625	0.187			2.625 +.001 / -.001		0.187 +.015 / -.000		
J22502625250/N	2.250 +.003 / -.003	2.250	2.625	0.250			2.625 +.001 / -.001		0.250 +.015 / -.000		
J22502750250/N	2.250 +.003 / -.003	2.250	2.750	0.250			2.750 +.001 / -.001		0.250 +.015 / -.000		
J22502875250/N	2.250 +.003 / -.003	2.250	2.875	0.250			2.875 +.001 / -.001		0.250 +.015 / -.000		
J23753000250/N	2.375 +.003 / -.003	2.375	3.000	0.250			3.000 +.001 / -.001		0.250 +.015 / -.000		

NOTE: MINIMUM LINE ORDER MAY APPLY



J/N SERIES - NBR/STEEL

Ref.Number	Rod diameter	Nominal Seal Dimensions			Housing Dimensions						
	Tol.	d	D	h	d1	Tol.	D1	Tol.	h1	Tol.	
J25003000250/N	2.500 +.003 / -.003	2.500	3.000	0.250			3.000 +.002 / -.002		0.250 +.015 / -.000		
J25003125250/N	2.500 +.003 / -.003	2.500	3.125	0.250			3.125 +.002 / -.002		0.250 +.015 / -.000		
J27503125187/N	2.750 +.003 / -.003	2.750	3.125	0.187			3.125 +.002 / -.002		0.187 +.015 / -.000		
J27503250250/N	2.750 +.003 / -.003	2.750	3.250	0.250			3.250 +.002 / -.002		0.250 +.015 / -.000		
J27503750375/N	2.750 +.003 / -.003	2.750	3.750	0.375			3.750 +.002 / -.002		0.375 +.015 / -.000		
J28753375250/N	2.875 +.003 / -.003	2.875	3.375	0.250			3.375 +.002 / -.002		0.250 +.015 / -.000		
J30003500250/N	3.000 +.003 / -.003	3.000	3.500	0.250			3.500 +.002 / -.002		0.250 +.015 / -.000		
J30003750250/N	3.000 +.003 / -.003	3.000	3.750	0.250			3.750 +.002 / -.002		0.250 +.015 / -.000		
J32503875312/N	3.250 +.003 / -.003	3.250	3.875	0.312			3.875 +.002 / -.002		0.312 +.015 / -.000		
J35004000250/N	3.500 +.003 / -.003	3.500	4.000	0.250			4.000 +.002 / -.002		0.250 +.015 / -.000		
J37504375328/N	3.750 +.003 / -.003	3.750	4.375	0.328			4.375 +.002 / -.002		0.328 +.015 / -.000		



NOTE: MINIMUM LINE ORDER MAY APPLY